GROUND WATER SURVEY REPORT

~~OPEN WELL~~ / BOREWELL
DATE OF SURVEY

Name of the Party : BBMP Funding

Location of the Site : Nanakpura, Ulsoor

Area of the land :

INVESTIGATION REPORT

GEOLOGY OF THE AREA : Clayey, granitic & tuffs

Recommended Site for drilling : W1

Total depth to be drilled : 1200'

Approx. casing pipe required : 135'-145'

No. of water bearing Zones : -4-

No. of favorable spots marked : -1-

Qty. of water expected : 2"-3"

Method of survey carried out : Geophysical

Remarks : 6/12" dia borewell at W1

330'-1150'

T.O. : Terms & Conditions

HYDROGEOLOGIST
(M.G. RAJASHEKHAR, M.Sc., DEG., F.G.S.)

Assistant Executive Engineer
Vidyaranyapura Sub Division
BBMP, Bangalore - 97

A N-09

BOREWELL SITE PLAN

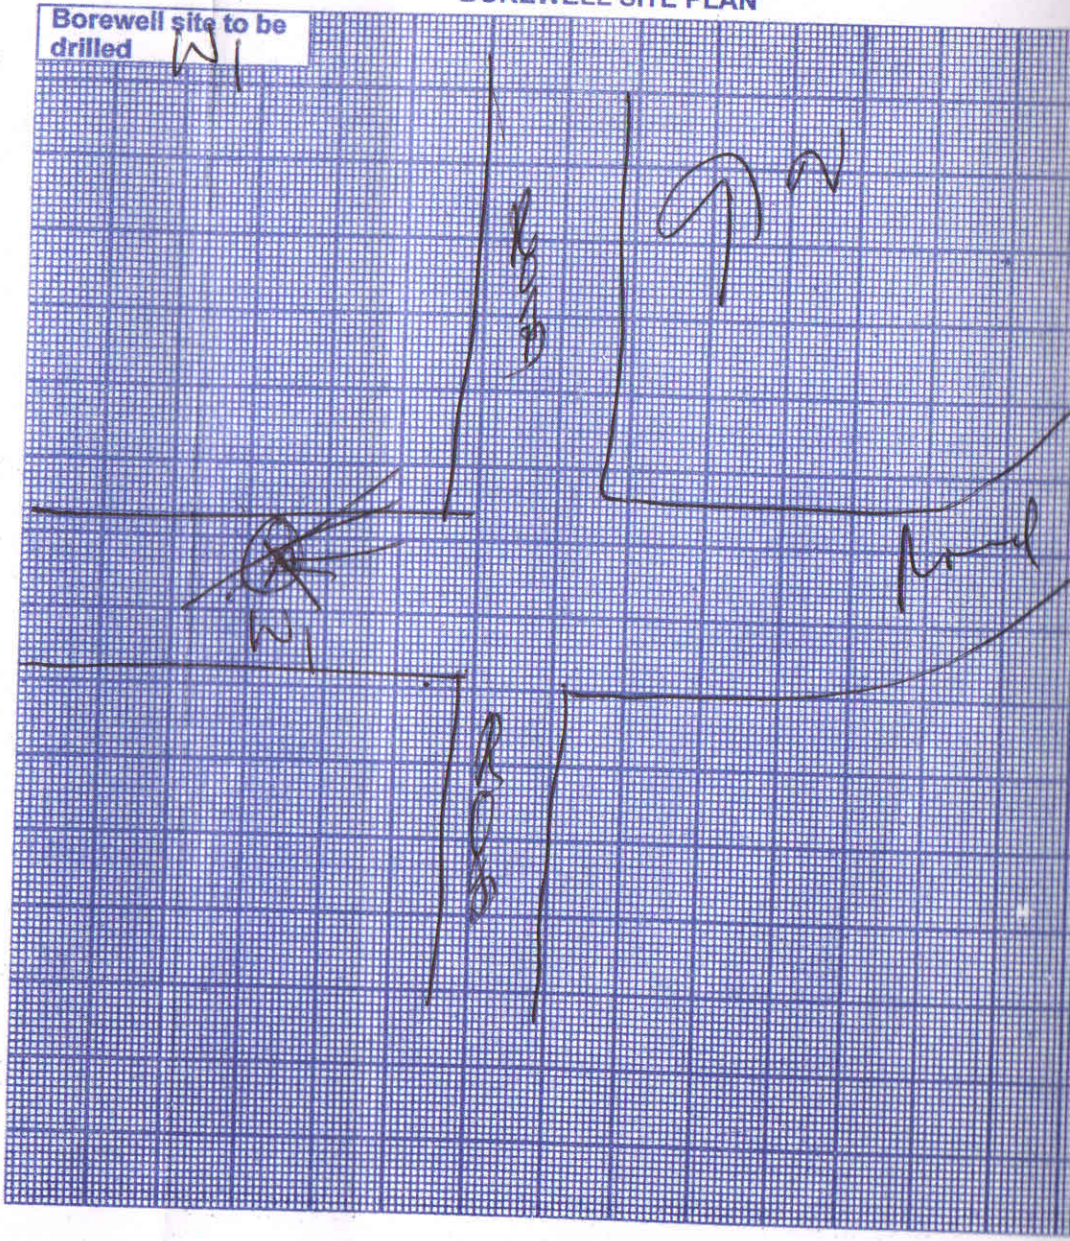

ROUND WATER SURVEY REPORT

~~OPEN WELL~~ / BOREWELL
DATA OF SURVEY

Name of the Party : BBMP undertaking

Location of the Site : Hosakerehalli, Chikkapura

Area of the land :

INVESTIGATION REPORT

GEOLOGY OF THE AREA : Granite, charnockite

Recommended Site for drilling : W1

Total depth to be drilled : 1000-1200'

Approx. casing pipe required : 130'-140'

No. of water bearing Zones : 4

No. of favorable spots marked : 2

Qty. of water expected : 2½"-3"

Method of survey carried out : Geophysical

Remarks : 6½" dia borewell at W1

360'-1150'

HYDROGEOLOGIST
(M.G. RAJASHEKHAR, M.Sc., DEG., F.G.S.)

T.O. : Terms & Conditions

Bangalore - 97

Dt: 4.09

BOREWELL SITE PLAN

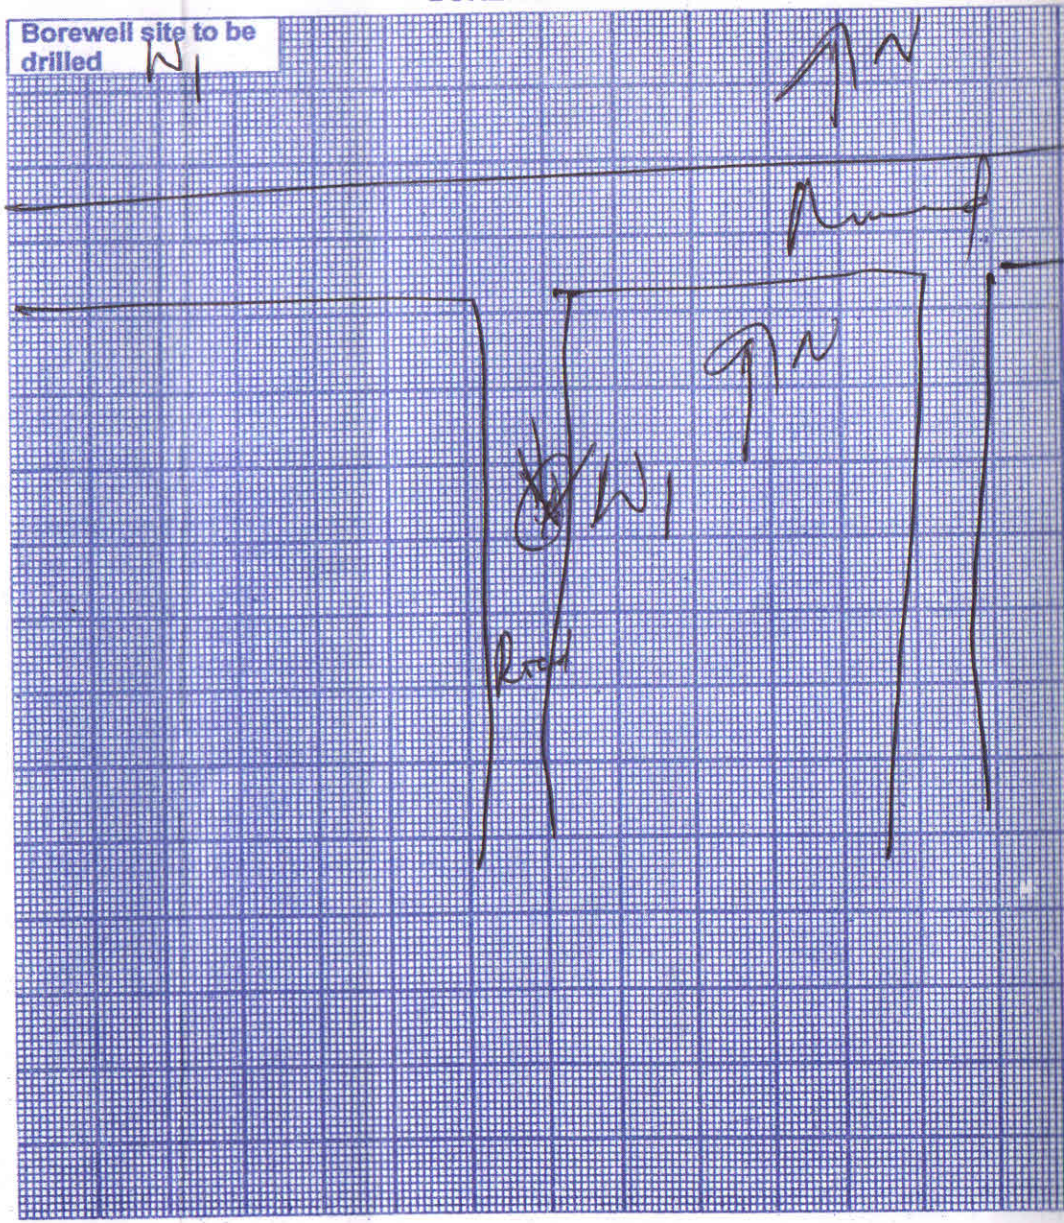

ROUND WATER SURVEY REPORT

~~OPEN WELL~~ / BOREWELL
DATE OF SURVEY

Name of the Party : BBMP Ward 9

Location of the Site : Banaswadi Main Road

Area of the land : Vidyapeeta, Thindlu Main Road

INVESTIGATION REPORT

GEOLOGY OF THE AREA : Granite gneiss, charnockite terrain -

Recommended Site for drilling : W1

Total depth to be drilled : 1000'-1200'

Approx. casing pipe required : 140'-150'

No. of water bearing Zones : - 2 -

No. of favorable spots marked : - 1 -

Qty. of water expected : 2"-2½"

Method of survey carried out : Ground

Remarks : 6½" dia bore at W1

440'-1150'
(4 bore)

T.O. : Terms & Conditions

HYDROGEOLOGIST
(M.G. RAJASHEKHAR, M.Sc., DEG., F.G.S.)

Assistant Executive Engineer
Vijayaranyapura Sub Division
BBMP Bangalore - 97

Ai- W-09

BOREWELL SITE PLAN